

MST

SERIES

10-2000 kVA

3:3
PHASE

1-30 kVA

1:1
PHASE

STATIC VOLTAGE STABILIZER



INDUSTRY



TRANSPORT



MEDICAL



TOWER



POWER FACTOR



SERVICE



HIGHLIGHTS

- Microprocessor Controlled Voltage Stabilisation
- Precise Output Voltage Accuracy
- True Static-Modular Design with Thyristor Technology
- High Voltage Regulation Speed
- Maintenance Free

Highly Reliable and Endurable Static Design

- Microprocessor controlled Static design stabilizers automatically regulate and protect the loads against dangerous voltage changes.
- Compatible with all load types and offering independent phase control, they deliver ultra-fast response times in correcting under / over voltages, sags and surges - making them ideal for highly sensitive / mission critical loads and applications.




POWER
FORLIFE

Aytemiz
MAKELSAN
Uninterruptible Power Supplies

Standard Electrical Features

- Wide Input Voltage Range
- Precise Output Voltage Accuracy $\pm 1\%$ to $\pm 5\%$
- Ultra Fast Voltage Regulation (500V/s)
- True 32-bit Microcontroller Controlled
- High Efficiency $> 97\%$
- Independent Phase Regulation to Correct Voltage and Load Imbalance
- Electronic Protection Against Over Load, Low Voltage, High Voltage, Over Temperature, Over Current and Short Circuit
- Overload Protection up to 150%
- Fast Responsive to Voltage Surges
- User Friendly, Easy and Comprehensive LCD Display and Mimic Diagram

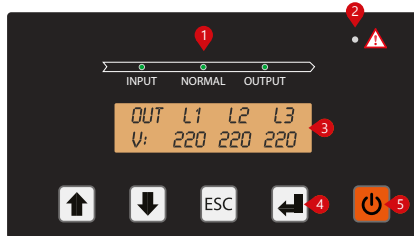

1. Input Led
2. Alarm/Warning Led
3. LCD Display
4. Menu Keys
5. On/Off Button

- Advanced Alarm Menu
- Manual Bypass
- Auto Restart when Mains Available
- Full Electronic Static Structure with No Moving Parts, Delivering a 'Maintenance Free' Voltage Regulation Solution
- Compact Design with High Quality Material and Minimum Malfunction Hazard
- Designed, Manufactured and Supplied to Comply with
- Fully CE Compliant and Labelled


Flexibility

- Available at any required input voltage value and range.
- Available at any required output voltage value and tolerance from $\pm 1\%$ to $\pm 5\%$.
- Output voltage can be adjusted by the LCD panel.
- Functionable with 50Hz and 60Hz.
- Optional MCCB can be added to the output to provide additional protection.
- Isolation transformer or voltage changing auto-transformer can be added for both input and output.
- Indoor and outdoor special cabinets with various IP protection classes can be provided.
- Optional EMC-filters at both input and output.
- Optional high-voltage protection and surge arrester.
- Optional Modbus.

MICROPROCESSOR CONTROLLED THYRISTOR TECHNOLOGY

Based on high speed semiconductor (Thyristor) technology and all digital microprocessor control, MST Series Static Voltage Stabilizers continuously monitor the incoming supply. Should the incoming voltage rise or drop, the stabilizers will automatically control the output to ensure the voltage reaching the load equipment always remains constant at the requisite voltage.


Inbuilt spike protection ensures the load is continuously protected against harmful mains born high energy spikes and surges.

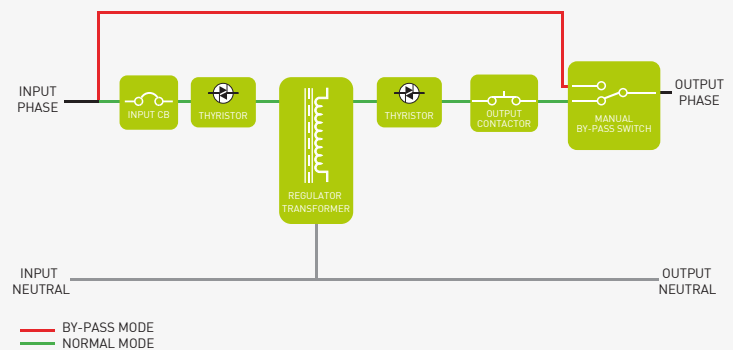


Static Voltage Stabilizer Single Line Diagram

DETAILS


MST SERIES 10-30 kVA

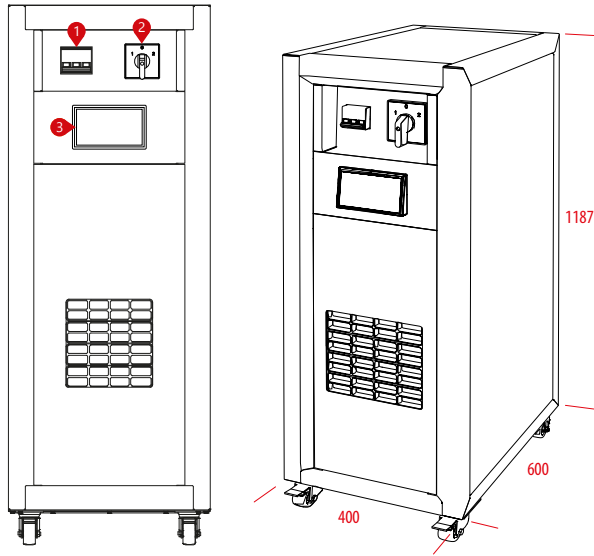

MST SERIES 40-60-75 kVA

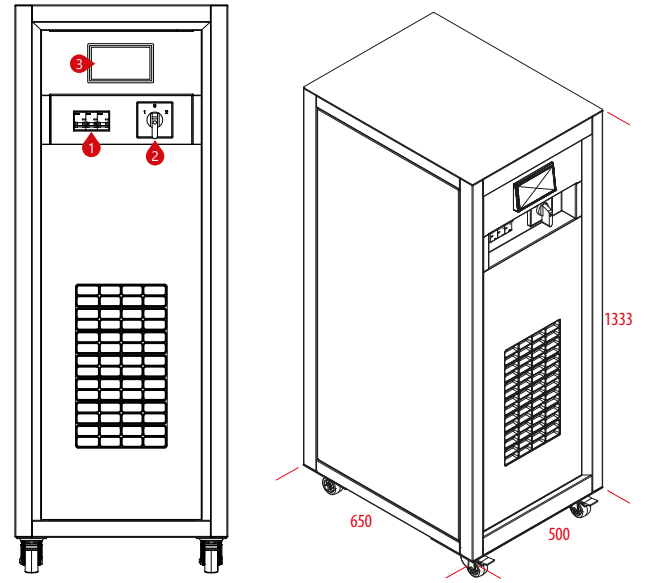



MST SERIES 100-120-150 kVA

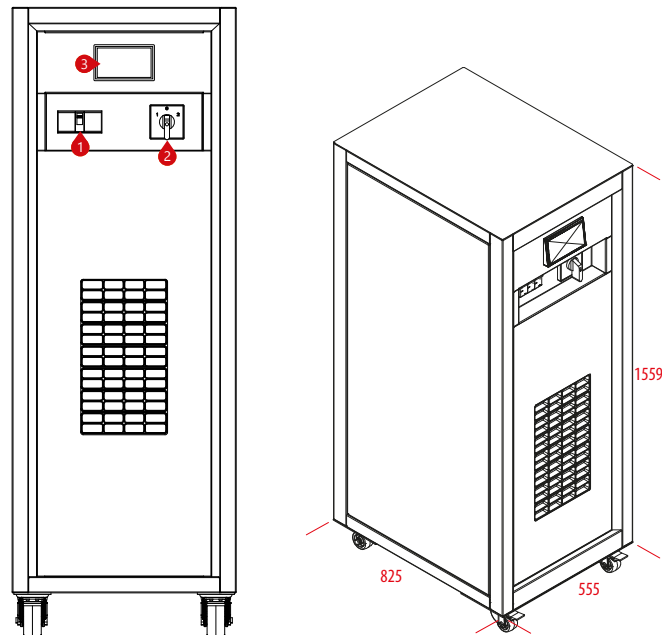

1. Input Switch
2. Bypass Switch
3. LCD Display
4. Optional Card Slot
5. Connection Terminal (Rear Panel)



DETAILS

MST SERIES 200-300-400-500 kVA

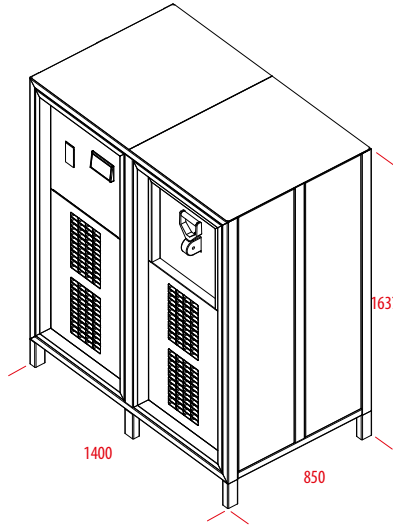
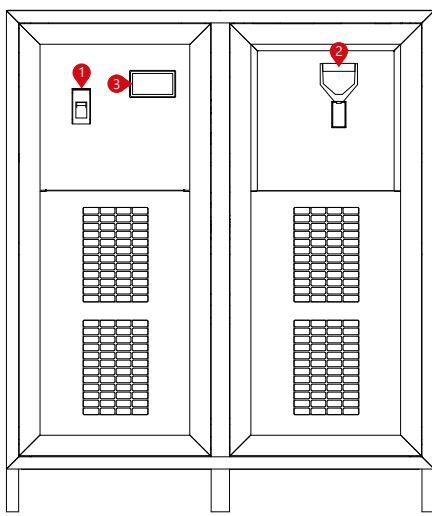


1. Input Switch
2. Bypass Switch
3. LCD Display
4. Optional Card Slot
5. Connection Terminal (Rear Panel)

MST SERIES 600-800-1000-1250 kVA

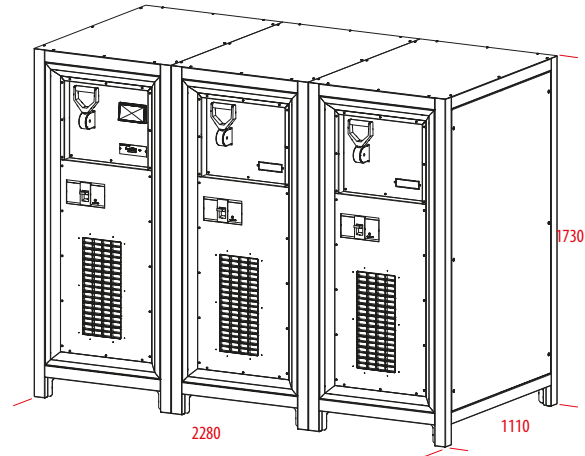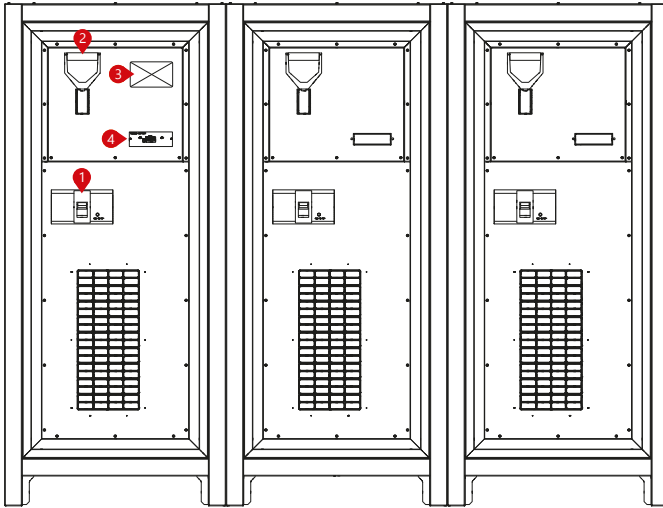

MST SERIES 1600-2000 kVA

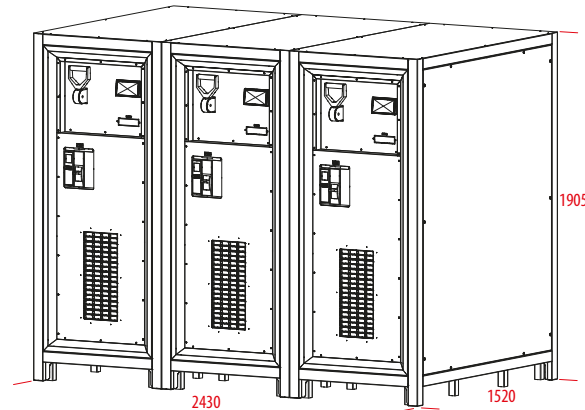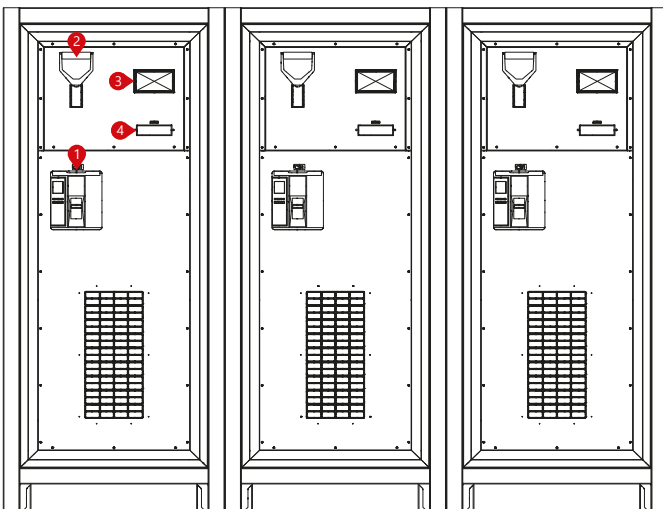

MODEL																						
Capacity (kVA)		10	15	22,5	30	45	60	75	100	120	150	200	250	300	400	500	600	800	1000	1250	1600	2000
INPUT																						
In. Vol. Correct. Interval		275~450 VAC (Optional: 190V~485V)																				
Operation Frequency		50~60 Hz (±10%)																				
Line Input Protection		Overcurrent Thermic Fuse																				
OUTPUT																						
Output Voltage		380 VAC RMS ±3% (Std.)					380 VAC RMS ±5% (Optional 1% to 5%)															
Overloading		10min 125% Load, 1min 150% Load, 10sec 200% Load, 20ms 500% Load																				
Correction Speed		500 Volt/sec																				
Upturn Period		20ms																				
Output Protection		Short Circuit, Overload, Overtemperature, Over and Low Voltage Protections																				
WORKING PRINCIPLE		Microprocessor Controlled, Full Automatic, Static, Semi Conductor Electronic Structure Maintenance Free																				
CONTROL PANEL																						
Display and Buttons		Load Level, Input-Output Voltage																				
Alert Message		Input Low/High, Output Low/High, Overtemperature																				
GENERAL																						
Efficiency		>97% (Full Load)																				
Mechanical Bypass		“Manually Controlled Line - PAKO SWITCH Selects Voltage Regulator” Switch Turn On/Off																				
Protection Level		IP20																				
Standard		TS EN 61000-6-2:2006, TS EN 61000-6-3:2007 (EMC), IEC60204-1+A1:2008 (LVD)																				
ENVIRONMENTAL																						
Operating Temperature		-10°C~50°C																				
Storage Temperature		-25°C~60°C																				
Relative Humidity		<90%, DIN (40040)																				
Altitude		<2000m																				
Noise Level		<50 dB				<55 dB			<58 dB			<58 dB					<63 dB					
DIMENSIONS & WEIGHT		10	15	22,5	30	45	60	75	100	120	150	200	250	300	400	500	600	800	1000	1250	1600	2000
Cabinet Dimensions (mm)	Width	400				500			555			1400					2280				2430	
	Depth	600				650			825			850					1110				1520	
	Height	1187				1333			1559			1637					1730				1905	
Weight (Kg)		80	95	112	120	175	203	233	277	320	369	639	705	775	857	930	1670	1800	1890	2110	2820	3150

Aytemiz-Makelsan reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Aytemiz-Makelsan products previously or subsequently sold. Aytemiz-Makelsan does not guarantee the items of the accuracy and completeness.

MODEL										
Capacity (kVA)		1	2	3	5	7,5	10	15	20	30
INPUT										
In. Vol. Correct. Interval		120~230 / 145~245 / 160~250 VAC								
Operation Frequency		50~60 Hz (±10%)								
Line Input Protection		Overcurrent Thermic Fuse								
OUTPUT										
Output Voltage		220 VAC RMS ±3% (Std.)		220 VAC RMS ±5% (Optional 1% to 5%)						
Overloading		10min 125% Load, 1min 150% Load, 10sec 200% Load, 20ms 500% Load								
Correction Speed		500 Volt/sec								
Upturn Period		20ms								
Output Protection		Short Circuit, Overload, Overtemperature, Over and Low Voltage Protections								
WORKING PRINCIPLE		Microprocessor Controlled, Full Automatic, Static, Semi Conductor Electronic Structure Maintenance Free								
CONTROL PANEL										
Display and Buttons		Load Level, Input-Output Voltage								
Alert Message		Input Low/High, Output Low/High, Overtemperature								
GENERAL										
Efficiency		>97% (Full Load)								
Mechanical Bypass		"Manually Controlled Line - PAKO SWITCH Selects Voltage Regulator" Switch Turn On/Off								
Protection Level		IP20								
Standard		TS EN 61000-6-2:2006, TS EN 61000-6-3:2007 (EMC), IEC60204-1+A1:2008 (LVD)								
ENVIRONMENT										
Operating Temperature		-10°C~50°C								
Storage Temperature		-25°C~60°C								
Relative Humidity		<90%, DIN (40040)								
Altitude		<2000m								
Noise Level		<50 dB								
DIMENSIONS & WEIGHT		1	2	3	5	7,5	10	15	20	30
Dimensions (mm)	Width	192		260				430		
	Depth	361		453				596		
	Height	352		416				777		

Aytemiz-Makelsan reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Aytemiz-Makelsan products previously or subsequently sold. Aytemiz-Makelsan does not guarantee the items of the accuracy and completeness.